

TIMBER CLAD WPC

CLADDING
INTERIOR & EXTERIOR




Weather Resistance



**UV and Weather
Resistant**



**Low Maintenance
No Surface
Treatment**




Climate shock Resistance


**A Seamless blend of
Aesthetics, Innovation and Sustain ability**




Colors




Light Walnut




Teak



Grey





Charcoal



Ipe

Size	15 X 115mm
Length	2.4m / 2.7m / 3m
Class	Wpc Co-Extrusion
Grade	TMT Grade - A

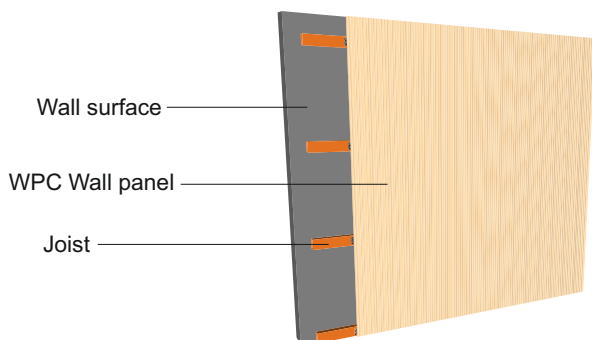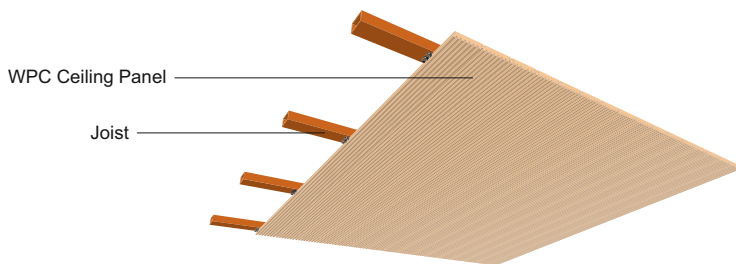

APPLICATIONS

- Kiosk
- Balcony cladding
- Canopy
- Duct covering
- Fence, rail & screen
- Gate cladding & Highlighter
- Roof cladding
- Signage
- Sliding Shutter
- Partition
- Ventilated facade
- Prefab hut



Thickness
15mm



Length
2.2mm, 2.7m, 3.6 or customized



Ingredient
50%wood, fiber, 38% HDPE, 12% additive




Width
115mm




Color
OAK, Maple, Teak or customized




Colors




Light Walnut




Teak



Ipe



Grey





Charcoal

Size	25 X 140mm
Length	2.4m / 2.7m / 3m
Class	Wpc Co-Extrusion
Grade	TMT Grade - A

APPLICATIONS

- Kiosk
- Balcony cladding
- Canopy
- Duct covering
- Fence, rail & screen
- Gate cladding & Highlighter
- Roof cladding
- Signage
- Sliding Shutter
- Partition
- Ventilated facade
- Prefab hut

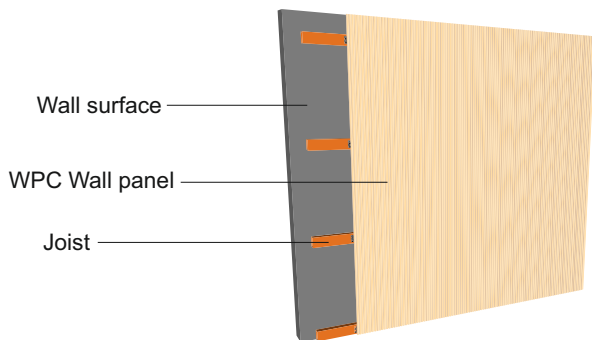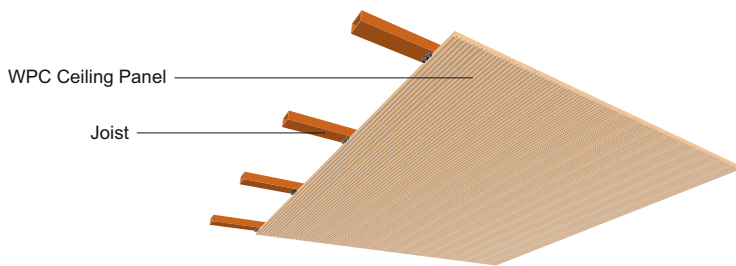

Thickness
25mm

Length
2.2mm, 2.7m, 3.6 or customized

Ingredient
50%wood, fiber, 38% HDPE, 12% additive


Width
140mm

Color
OAK, Maple, Teak or customized


WPC CO-EXTRUSION

TIRO


Colors




Light Walnut




Teak



Ipe






Grey



Charcoal



Size	25 X 198mm
Length	2.4m / 2.7m / 3m
Class	Wpc Co-Extrusion
Grade	TMT Grade - A

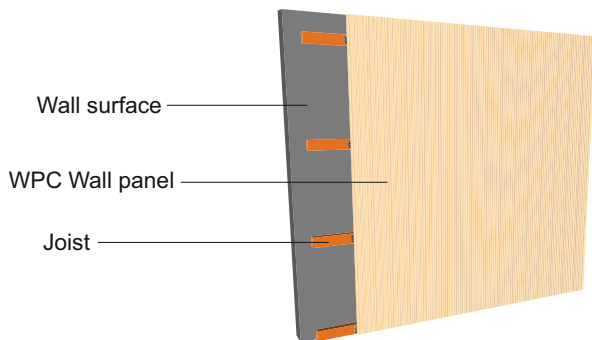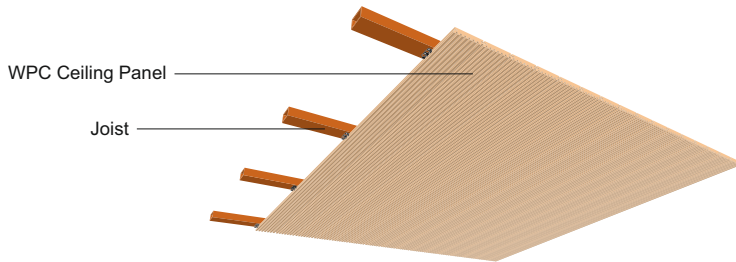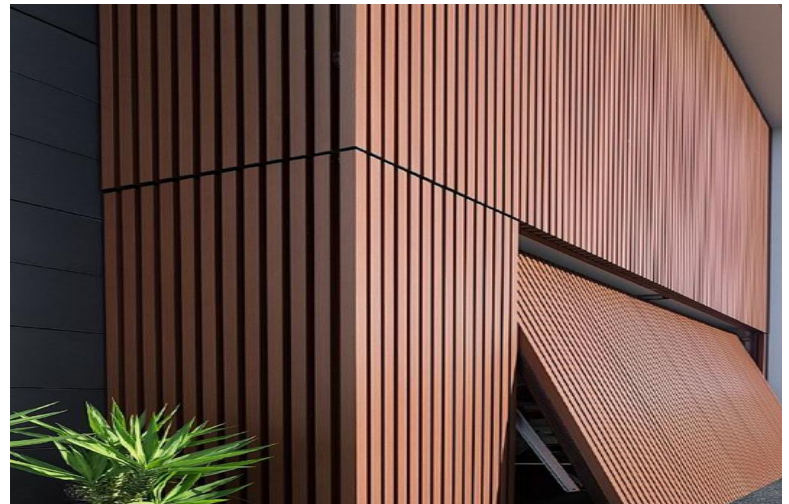

APPLICATIONS

- Kiosk
- Balcony cladding
- Canopy
- Duct covering
- Fence, rail & screen
- Gate cladding & Highlighter
- Roof cladding
- Signage
- Sliding Shutter
- Partition
- Ventilated facade
- Prefab hut

Thickness
25mm


Length
2.2m, 2.7m, 3.6 or customized

Ingredient
50%wood, fiber, 38% HDPE, 12% additive


Width
198mm

Color
OAK, Maple, Teak or customized


Colors




Teak




Light Walnut




Ipe



Charcoal



Grey

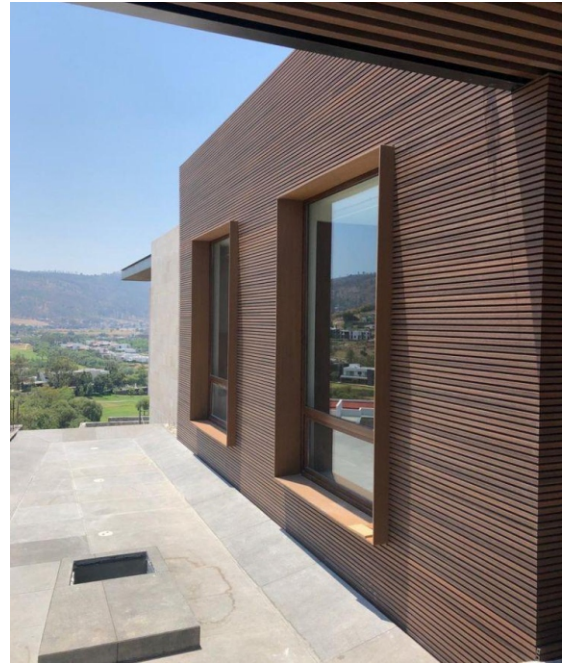


Size	25 X 195mm
Length	2.4m / 2.7m / 3m
Class	Wpc Co-Extrusion
Grade	TMT Grade - A



WPC Ceiling Panel


Joist

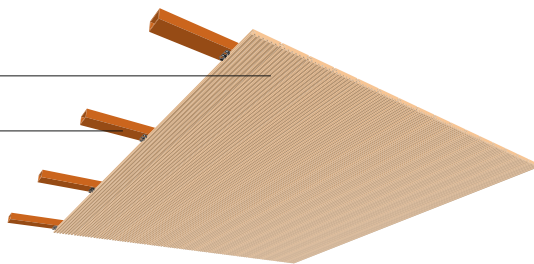

Wall surface

WPC Wall panel

Joist



APPLICATIONS

- Kiosk
- Balcony cladding
- Canopy
- Duct covering
- Fence, rail & screen
- Gate cladding & Highlighter
- Roof cladding
- Signage
- Sliding Shutter
- Partition
- Ventilated facade
- Prefab hut



Thickness
25mm



Length
2.2m, 2.7m, 3.6 or customized



Ingredient
50%wood, fiber, 38% HDPE, 12% additive



Width
195mm




Color
OAK, Maple, Teak or customized




Size	18 X 95mm
Length	2.4m / 2.7m / 3m
Class	Wpc Co-Extrusion
Grade	TMT Grade - A


Colors




Light Walnut




Teak





Ipe



Charcoal



Grey

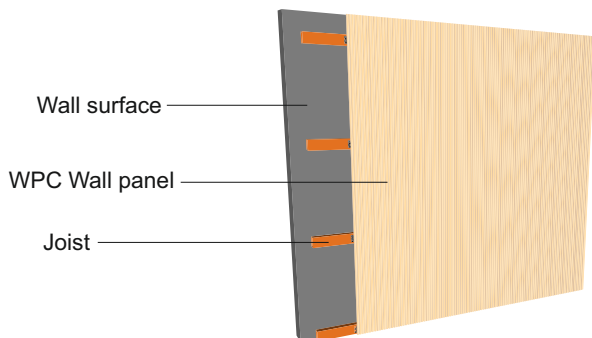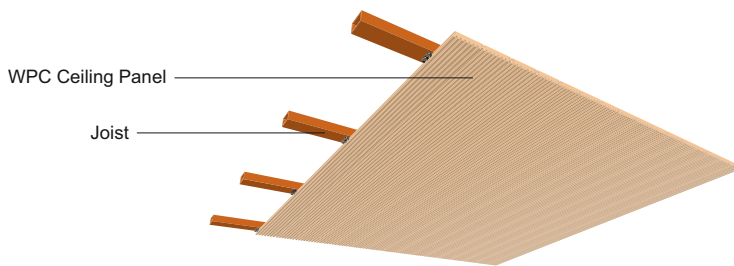

APPLICATIONS

- Kiosk
- Balcony cladding
- Canopy
- Duct covering
- Fence, rail & screen
- Gate cladding & Highlighter
- Roof cladding
- Signage
- Sliding Shutter
- Partition
- Ventilated facade
- Prefab hut



Thickness
18mm



Length
2.2m, 2.7m, 3.6 or customized



Ingredient
50%wood, fiber, 38% HDPE, 12% additive




Width
95mm



Color
OAK, Maple, Teak or customized

TIMBER CLAD WPC

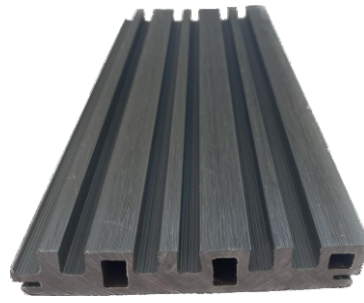

CLADDING

PROPERTIES



Weather Resistance : TIMBER CLAD WPC is highly weather resistance as there is no effect on the surface or the core of the ultra clad material when exposed conditions. It stand firm in high / low temperature or high/ low humidity levels.



UV Resistance : A special UV protected treatment makes UV resistant, with its special effect, the surface doesn't lose its color when exposed to direct sunlight for long periods



Climate shock Resistance : TIMBER CLAD WPC is resistant to sudden change in temperature and humidity of the atmosphere, and maintains its physical and mechanical properties remaining firm for long.



Corrosion free : TIMBER CLAD WPC is absolutely corrosion free unlike other external covering products.



Corrosion free : TIMBER CLAD WPC is graffiti resistant, any writing marks made on the surface can be easily removed with diluted solvents.

ARRAY OF APPLICATIONS

- Kiosk
- Balcony cladding
- Canopy
- Duct covering
- Fence, rail & screen
- Gate cladding & Highlighter
- Roof cladding
- Signage
- Sliding Shutter
- Partition
- Ventilated facade
- Prefab hut

FEATURES & BENEFITS

- Decorative
- High Weather resistance
- Optimal light fastness
- Scratch resistance
- Solvent resistant
- Self supporting
- Impact resistant
- Heat resistant
- Fire resistant
- Easy to clean and maintain overall
- light weight substructure and facade
- Sustain ability
- Quick and easy to assemble
- Increased sound proofing function (up to 15 Db)